

#### WARRANTY INFORMATIONS

DuPont warrants its inherent flame resistant garment, made of Nomex®, for protection of industrial personnel to be free from defects in workmanship and materials for 12 months from date of purchase provided the garment is properly used and maintained in accordance with the user instructions attached to this garment.

The obligation of DuPont under this warranty is to repair or replace the garment if defects are determined to be present. The washed garment must be returned to DuPont at the buyer's expense and the buyer must get advance approval from DuPont to return the garment. When received, the garment will be evaluated by DuPont, which will determine the appropriate action and inform the Buyer of the disposition. The term defect refers to defective seams, defective stitching, loose or broken zippers, loose or broken snaps, and materials which have flaws such as holes and weak areas.

This warranty does not cover damage due to exposure to ultraviolet light, chemicals, loss of performance due to normal wear or heat exposure, common fire environment hazards or improper use, storage, care or maintenance.

**DUPONT MAKES NO OTHER WARRANTY OF ANY KIND, WHETHER EXPRESS OR IMPLIED, WITH RESPECT TO ITS PRODUCTS, AND SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. EXCEPT FOR THE OBLIGATIONS SPECIFICALLY SET FORTH IN THIS WARRANTY STATEMENT, IN NO EVENT SHALL DUPONT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER BASED ON CONTRACT, TORT OR ANY OTHER LEGAL THEORY AND WHETHER ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.**

**If you believe the garment to be defective in accordance with the above criteria, please contact DuPont for prior authorization to return, at: info.nomex@che.dupont.com**

#### STORAGE INSTRUCTIONS

Do not store in sunlight. The strength of the fabric can be degraded by prolonged exposure to sunlight or artificial light. Store in a shaded area or cover with a dark cloth. Do not store where contamination of the garment may occur.

#### REPAIR

Repairs or alterations to the garment must be made with flame resistant components (fabric, thread, and fasteners) of comparable quality.

#### PILLING ADVISORY

Fabrics made with DuPont™ Nomex® IIIA and Nomex® Comfort brand fibers may be susceptible in varying degrees to pilling on their surface. Differences in fabric processing as well as differences in how garments are worn and cleaned can produce different levels of pilling. The flame resistance properties of DuPont™ Nomex® IIIA and Nomex® Comfort fabrics are not affected by the level of pilling.

#### COLOR FASTNESS ADVISORY

Fabrics made with DuPont™ Nomex® IIIA and Nomex® Comfort brand fibers are available in various colors. We are advising users of these fabrics that due to the color change of these fibers after extended exposure to UV light not all colors may be appropriate for all applications. The flame resistance properties of the fabrics are not affected. The change in color will vary according to the color chosen. If the fabrics will be subjected to significant amounts of UV light exposure (sunlight or artificial), it may be desirable to select colors less likely to be affected. Garments made with the fabrics should be stored so that they are protected from unnecessary exposure to UV light.

#### RETIREMENT AND DISPOSAL

The useable service life of this garment depends on the work environment, frequency of use, and proper maintenance and cleaning of the garment. Do not wear damaged or contaminated garments. Garment should be retired from service after significant exposure to heat and flame. Dispose of used garment per local regulations.

**This information corresponds to our current knowledge on the subject. It is offered solely to provide possible suggestions for your own determinations. It is not intended, however, to substitute for any testing you may need to conduct to determine the level of risk and the suitability of the garment or accessory for your particular purposes. It is the user's responsibility to determine the level of risk and the proper protective equipment needed for the user's particular purposes. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in actual end-use conditions,**

**DUPONT MAKES NO WARRANTIES AND ASSUMES NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION.**

**Failure to read, understand, and follow these instructions may result in serious bodily injury or death.**

DuPont Specialty Products Operations Sàrl  
DuPont Safety and Construction  
2, chemin du Pavillon  
CH-1218 Le Grand Saconnex (Geneve)  
Switzerland  
e-Mail : [info.nomex@che.dupont.com](mailto:info.nomex@che.dupont.com)  
website :



**Nomex.**  
NEVER OUT.™

**DUPONT®**

*The miracles of science™*

Protection Technologies



Essential  
Thermal  
Solutions



# Nomex® NEVER OUT™

For over 200 years, DuPont has been a leader in science and innovation. For nearly 40 years, we have leveraged that history to offer a wide range of proven solutions, including some of the most trusted brands in the protective apparel industry.

DuPont has manufactured this garment using Nomex®, the revolutionary flame resistant fiber invented by DuPont and trusted by industrial professionals and safety managers around the world for protection against fire and electric arc hazards.

## USE, CARE, AND MAINTENANCE OF YOUR DUPONT® NOMEX® GARMENT

### ONLY TO BE REMOVED BY THE USER

This user-guide provides important information regarding the use, care, and maintenance of your Nomex® garment. Failure to read, understand, and follow these instructions may result in serious bodily injury or death.

### GARMENT MANUFACTURER

Garment manufacturer is E.I. du Pont de Nemours and Company. Contact information is provided on the back page of this User Guide.

### COMPOSITION

This garment is made using a DuPont™ Nomex® fabric that is a blend of 93% meta-aramid, 5% para-aramid, 2% carbon/nylon antistatic fiber.

### SAFETY CONSIDERATIONS

The user is responsible to determine that this garment is appropriate for the intended use and complies with all laws and regulatory standards in the location of use. The user assumes all risks associated with the use of this product. DuPont shall not be liable for any loss, injury, or death arising out of the use of this product. This information guide should be made available to all users and those responsible for garment maintenance and care.

It is the user's responsibility to determine the level of hazards and proper personal protective equipment needed.

Flammable contaminants will reduce the thermal protection of any flame resistant garment. Wash this garment frequently to ensure that no greases, oily soils or other flammable contaminants are present when the garment is worn. Wash new garment before wearing to remove fabric processing aids and finishes.

### LIMITATIONS OF USE

This garment is flame resistant and is intended to minimize burn injury during short term and emergency exposure to flame or electric arc. The wearer should try to remove themselves as quickly as possible from the area where the fire or electric arc has occurred to minimize burn injury. It is intended to reduce the potential for injury, but protective apparel alone cannot eliminate all risk of injury. This garment must be used as part of general safety practices. Do not use for protection against continuous thermal loads, molten metal splash, hot liquids, or steam. Do not wear alone for structural or proximity fire fighting. Do not use for chemical protection. Failure to comply with these warnings may result in serious injury or death.

Only those persons who are properly trained and understand the requirements for use and care of the garment are qualified to wear it. The garment should not be worn until the user has read and understands all warnings and information contained in this User Information Guide. The user is responsible to ensure proper use consistent with NFPA 2113.

### INSPECTION BEFORE USE

It is the responsibility of this garment's user to examine its condition before and after each use to be sure that it is suitable for use and will provide adequate protection for the potential hazards to be encountered. Carefully inspect the garment for damage before and after use, including all fabric, seams, and closures. If fabric becomes torn, punctured or contaminated with flammable materials, or if closures are not functional, user should immediately discontinue use of garment.

Failure to fully inspect the garment may result in serious injury or death to the wearer. Never wear a garment that has not been fully inspected prior to use in a hazardous environment.

### GARMENT MARKINGS

If the user adds any lettering, emblems, nametags, trim, or other additions to the garment, the additions to the garment must be constructed with flame resistant materials and meet all applicable performance requirements. The addition of flammable markings to this garment will negatively impact the flame-resistance properties where applied.

None of the additional markings should cover the wording of the required labels for the garment.

### PROPER WEARING

- Do not wear flammable or meltable garments over this garment.
- For flash fire hazard exposures, undergarments made with flame resistant or non-melting fibers such as DuPont™ Nomex®, cotton, silk, wool, or rayon should be worn.
- For electric arc hazard exposures, wear the proper number of flame resistant clothing layers as dictated by an electric arc hazard analysis.
- Do not put on or take off the garment in a potentially explosive environment.
- In potentially explosive atmospheres, proper grounding procedures must be used for protection against electrostatic spark ignition.
- Garment should be loose fitting and provide adequate mobility for the intended use.
- All closures must be fully secured and sleeves and pant legs must extend to fully cover wrists and ankles.
- Shirts without a fully elastic waistband must be tucked inside the waistband of pants.

### CARE AND CLEANING INSTRUCTIONS

Flammable contaminants will reduce the thermal protection of any flame resistant garment. These contaminants should be removed before use. The garment should be laundered frequently to ensure that greases, oily soils, or other flammable contaminants are not present. Do not use chlorine bleach or detergents containing chlorine bleach. Chlorine bleach can impact fabric strength, the color of various components, and can reduce the overall durability of the apparel. The garment should be laundered separately from non-flame-resistant clothing to avoid contamination from lint, surface finishes, and other transferable flammable materials. Secure all closures before washing and drying.

Wash dark and light colors separately.

Pretreat greasy stains. Removal of grease or oil stains may require dry cleaning.

Machine wash in hot water (maximum 140°F/60°C) with a heavy duty detergent. Do not use soaps.

The use of fatty-based soaps for laundering is not recommended due to the potential formation of insoluble scums with hard water. Soap scums may be flammable and could adversely affect the thermal protective qualities of the garment.

Tumble dry on low heat (maximum 160°F/71°C). Do not over dry.

Do not use fabric softeners or dryer sheets. The use of certain fabric softeners or treatments can cause build up of flammable residues that will impact the thermal protective properties of the garment.

When using commercial laundry aids, be sure to read and carefully follow manufacturer's instructions.

Do not line dry in sunlight.

إرشادات العناية والتنظيف.  
معالجة البقع الدهنية القابلة للاشتعال بقليل من كمادة الصابون الجارية لفي سطح طاوم للاشتعال بنا. يجب إزالة هذه الصواب بصفة منتظمة للتأكد من عدم وجود شعوم أو مواد زبقية أو في صواب قابل للاشتعال.  
لا تستخدم صابونات تحتوي على مادة الكبريت أو صابونات الصابون الجارية التي يمكن اشتعالها مع الماء الساخن. يمكن أن يتسبب هذا في تكوين طبقة غير قابلة للاشتعال وتلك التي يمكن اشتعالها مع هذه اللبوسات.

يجب غسل ملابس الحماية الجارية بشكل منفصل عن أي ملابس أخرى غير مقاومة للاشتعال وذلك لمنع وصول صواب إلى هذه اللبوسات.  
قم بإيقاف أزرار وصحات الملابس الجارية قبل عملية التنظيف.  
لا تجفف ملابس الحماية الجارية بتعليقها لأشعة الشمس.  
قم بغسل الأفران الساكنة عن القاعدة أثناء عملية التنظيف.


لا تحتاج ملابس الحماية الجارية إلى تنظيف جاف في الخصلة إزالة الصواب الزبينة وقيام المستخدم.  
ملابس الحماية الجارية تنقل على درجة لا تزيد عن 60 درجة مئوية باستخدام مسحوق غسيل قوي لا يتسبب قطع الصابون.  
لا توضع باستخدام مساحيق التبييض ذات البنية البيضاء في تنظيف ملابس الحماية الجارية لأنها قد تؤدي إلى تكوين مادة غير قابلة للاشتعال في شكل كبريت.

تنظيف ملابس الحماية الجارية بالبخار حيث لا تزيد درجة حرارة التنظيف عن 71 درجة مئوية مع ملاحظة عدم زيادة التنظيف.  
لا تستخدم المنظفات القوية لأنها قد تسبب في تكوين صواب قابل للاشتعال مؤثرة بذلك على خواص الحماية الجارية لللبوس.

### SIZING GUIDANCE

Coverall sizing is based on your chest size measurement (in inches). For a looser fit order coveralls 1 to 2 sizes larger than your chest measurement.

Stock Chest Sizes	Your Height	Garment Length
Even sizes from 36 to 60	5'7" to 5'11" (170 cm to 180 cm)	REGULAR
	6'0" to 6'3" (183 cm to 191 cm)	LONG

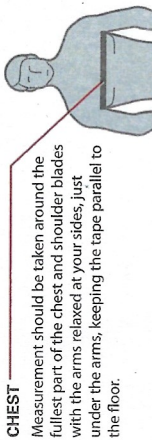


**CHEST**  
Measurement should be taken around the fullest part of the chest and shoulder blades with the arms relaxed at your sides, just under the arms, keeping the tape parallel to the floor.

### SHIRTS / JACKETS

Shirt sizing is based on your neck size measurement (in inches). For a looser fit, order shirts 1 size larger than your neck measurement.

Size	Standard Shirt Sizes					
	XS	S	M	L	XL	4XL
Neck	14	15	16	17	18	21
Chest	34	38	42	46	50	62

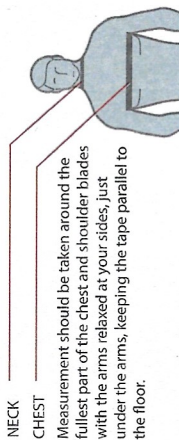


**NECK**  
**CHEST**  
Measurement should be taken around the fullest part of the chest and shoulder blades with the arms relaxed at your sides, just under the arms, keeping the tape parallel to the floor.

### PANTS

Pant sizing is based on your waist size measurement (in inches). The length of the inseam will need to be adapted to your body, as garments are delivered unhemmed.

Size	Standard Pant Sizes					
	30	32	34	36	38	40
Waist	30	32 <td>34</td> <td>36 <td>38</td> <td>40</td> </td>	34	36 <td>38</td> <td>40</td>	38	40
Inseam	42	44	46	48	50	52

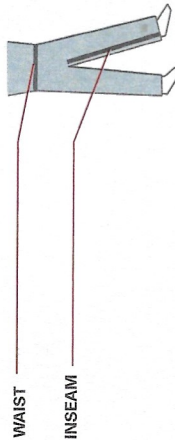

**WAIST**  
**INSEAM**